



**ONE OF THE SMARTEST INVESTMENTS
YOU'LL EVER MAKE**



805
**RESIDENTIAL
HORIZONTAL
SLIDING WINDOW**



**TM QUALITY IMPACT
WINDOW FEATURES:**


- FRAMES -- 25% thicker than competition
- 4" HIGH SILL -- prevents water intrusion in the most extreme weather
- TRIPLE WEATHER STRIPPING -- superior protection for air & water penetration
- NON-CORROSIVE SCREWS & HARDWARE -- standard with all windows
- OG/CONTURED GRID -- available on window exterior
- ULTRA SMOOTH ROLLING SASH -- ADA compliant, 5 lbs operating force, opens easier than competition
- STANDARD 7/16" GLASS -- thicker than competition
-  ENERGY EFFICIENT INSULATED/IMPACT GLASS -- available with all windows
-  CUSTOM COLORS -- Same color in and out or split finish available



Family Owned & Operated for Over 40 Years

*Manufacturer of Quality
Windows & Doors*
www.floridasbestwindow.com

805
RESIDENTIAL
Horizontal
Sliding Window

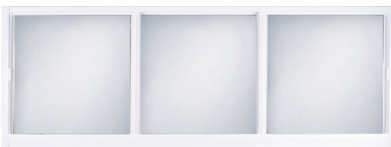

MINIMUM & MAXIMUM SIZES

2 PANEL

Min. Width: 24" -- Max. Width: 74"
Min. Height: 16" -- Max. Height: 63"

3 PANEL

Min. Width: 36" -- Max. Width: 111"
Min. Height: 16" -- Max. Height: 63"


CUSTOM
FRAME COLORS
AVAILABLE



STANDARD GLASS COLORS AVAILABLE



MADE IN THE USA

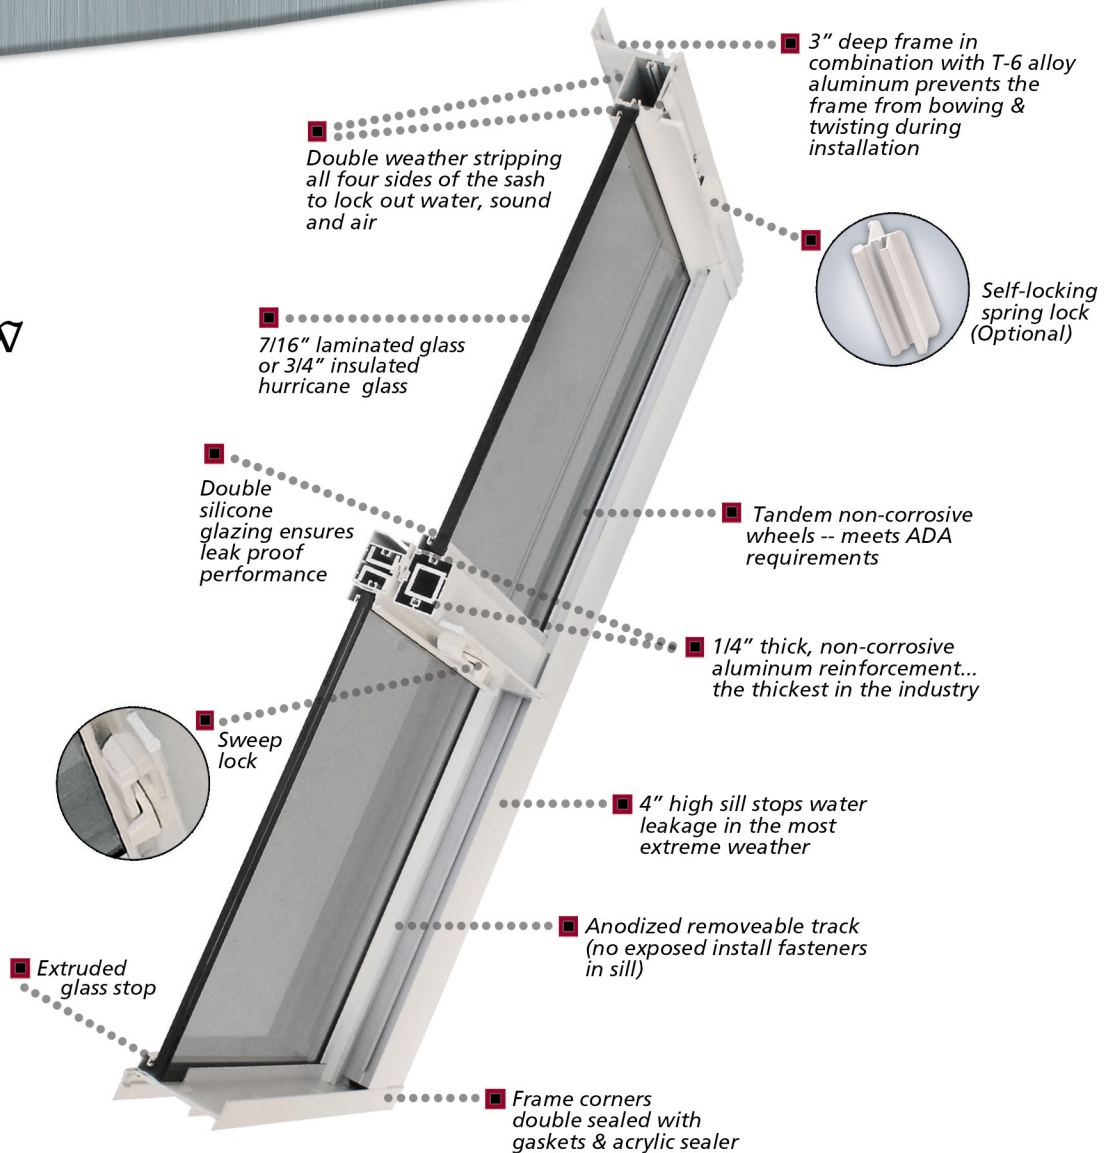

TEST TYPE	TEST SIZE	RESULTS
Air Infiltration (ASTM E 283)		6.24 PSF
Water Resistance (ASTME 547/E331)		13.5 PSF
Uniform Static Loadtest (ASTM-E330) Design Load	74 x 63 XO/OX--111 X 63 XO (7/16 ANN PVB)	+80 PSF -90 PSF
	74 x 63 XO/OX--111 X 63 XO (7/16 HS SGP)	+90 PSF -130 PSF
	74 x 63 XO/OX--111 X 63 XO (3/4 IGT)	+79 PSF -79 PSF
Cyclic Design Load Test After Missile Impact in Accordance to Miami/Dade County (TAS 201 & 203)	74 x 63 XO/OX--111 X 63 XO (7/16 ANN PVB)	+80 PSF -90 PSF
	74 x 63 XO/OX--111 X 63 XO (7/16 HS SGP)	+90 PSF -130 PSF
	74 x 63 XO/OX--111 X 63 XO (3/4 IGT)	+79 PSF -79 PSF